



Base Material

Drywall (Gypsum Wallboard) - 1/2-inch or 5/8-inch.

Anchor Material

The WallClaw Anchor™ has a finish nail starter and a blade-like body that easily penetrates drywall with minimal damage to the wall. This means the holding strength of the drywall is greater. The anchor's wide platform fins near the head provide greater load bearing capacity.

WallClaw Anchors™ are made of engineered nylon.

Fastener

Screws: #8 x 1-1/4"; Slot-Phillips Combo-Pan Head, Type 'B', Zinc. Provided with anchor.

Product Description


The WallClaw Anchor™ is a one piece, drivable wall anchor designed for use in both 1/2-inch and 5/8-inch drywall.

No drilling is required – simply hammer it in like a nail, attach the fixture to be mounted to the wall and fasten.

It is the fastest, easiest and among the strongest anchors available on the market.




Installation Instructions

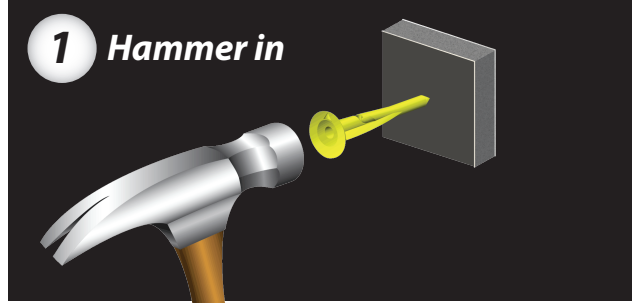

1. HAMMER IN

Hammer the anchor into the drywall with the arrow on the head of the anchor up.

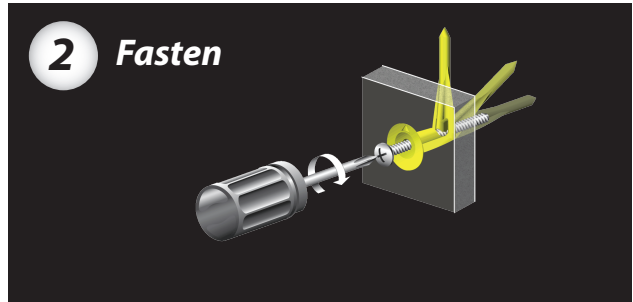

2. FASTEN

Place the device or fixture to be installed against the WallClaw Anchor™ opening and insert the screw provided. Tighten screw until secure. Do not over tighten.

Product Performance

Hangs up to 90 lbs. in 1/2-inch drywall.
Hangs up to 125 lbs. in 5/8-inch drywall.

WallClaw Anchors, LLC

3000 F Danville Blvd, Suite 530 • Alamo, CA 94507

(925) 658-5742 Main

(925) 884-5400 Facsimile

E-Mail: sales@wallclaw.com

Web Site: www.wallclaw.com