


Hammer-In Drywall Anchors

Instructions

For hanging items on 1/2" and 5/8" drywall. Same anchor works in BOTH 1/2" and 5/8" drywall. For kitchen, bath, art, shelving, closet, curtains, towel bars, and many other fixtures.

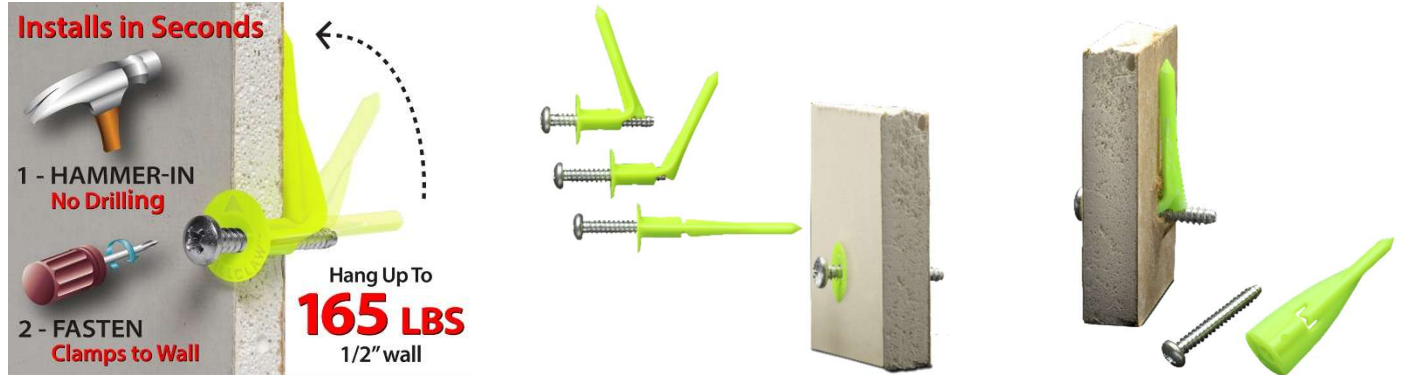

HAMMER – FASTEN – DONE

DEMO: <http://www.wallclaw.com/loc-n-load-demo-video/>

1. Hold the top and bottom of anchor body between your thumb and index finger.
2. Be sure the arrow on the top of the HEAD of the anchor is pointed up. See image →
3. Place the pointed nail tip of anchor on the wall where installation is desired.
4. Gently, and repeatedly tap the head of the anchor and gently drive the anchor into the wall.
5. Do NOT countersink the head into the drywall – this can damage the drywall.
6. Maximum thickness of fixture (bracket, mounting plate, etc.) should not exceed 1/8-inch with the 1-1/4" screw provided.
7. If fixture is thicker than 1/8-inch obtain and use a longer #8 Type B (Blunt Tip) screw similar to those provided with the anchor.
8. Attach fixture to anchor using BLUNT tip screws provided. Do NOT use sharp tipped screws.
9. When the screw is inserted and activates the locking leg behind the wall, the anchor head will draw flush onto the wall.



REMOVAL

1. Back screw out of anchor and remove fixture.
2. Removal of screw releases locking leg behind wall.
3. Reinsert screw into anchor – ONLY 1/4-inch.
4. Use screw as a handle and gently pull back on the screw, gently wiggle anchor and as the anchor comes out pull back and lift.
5. The small slit left behind in the wall is easily patched, typically with one pass of spackle.

Maximum hanging loads are shown based on fixture mounted flush to the face of the wall. Do not exceed MAXIMUM load ratings. Load ratings are only a guide. Maximum loads may vary, based on the quality and thickness of drywall, drywall condition, dimensions of object being hung and distance of object off face of wall. Other variables may also apply.

165
LBS
1/2" WALL

227
LBS
5/8" WALL



No Drilling
No Mess



Small Slit Left
Easy Repair

Not intended for use in studs, or for ceiling applications, or for mounting televisions to drywall.

Limited Warranty. These products are sold 'AS IS' without any expressed or implied warranties. WallClaw Anchor's sole liability, if any, shall be to replace this product or refund the purchase price. The performance of these products is subject to variable conditions.

WallClaw®, LOC-N-LOAD®, Blade®, Crystal®, Crystal Auger™ & Rocket® Anchors are registered trademarks. Patent, Trademark and Copyright Protected.